

VA-CABLE-IO-HR10-6p-OE-xxm



I/O cable 6-pin - open end Cable I/O

Highlights

- High quality and approved by Daheng Imaging
- Suitable for ME2S and MER3 Cameras
- Suitable for static scene




Product specification

End camera connector	6-PIN cycle connector
End host connector	Open or Open&DC
Cable diameter (optional)	4.3±0.15mm
Jacket	PVC
Cable color	Black
Connector durability	>3000 cycles
Min. bending radius	40mm
Max. bending cycle	3000 cycles
Tensile property	50N
Cable attribute	Static
Compatible product	6-PIN I/O interface cameras
Max. voltage	30 VDC
Certification	RoHS, UL
Operating temp.	-20°C ~ +80°C

Product table

Part number	Cable Length, L
VA-CABLE-IO-HR10-6p-OE-1.5m	1.5 m
VA-CABLE-IO-HR10-6p-OE-3m	3 m
VA-CABLE-IO-HR10-6p-OE-5m	5 m
VA-CABLE-IO-HR10-6p-OE-10m	10 m
VA-CABLE-IO-HR10-6p-OE-15m	15 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither VA Imaging nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

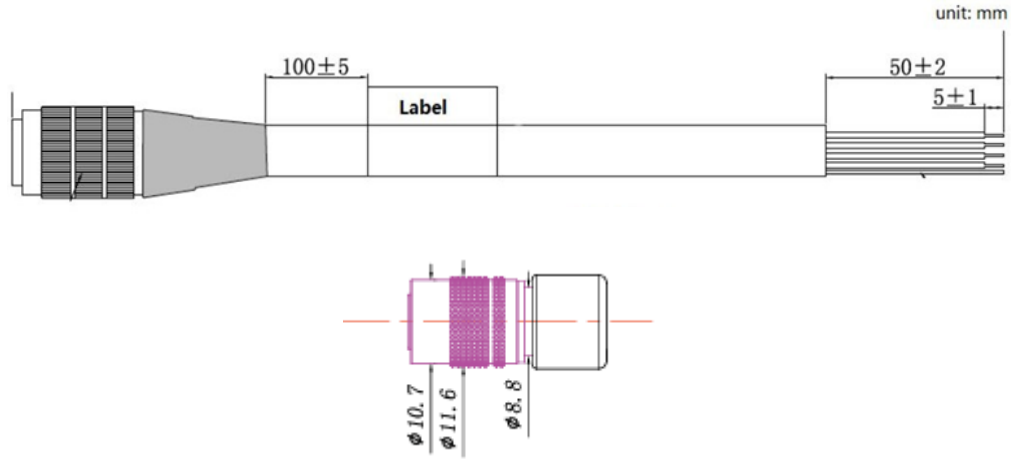

* for L parameter (unit mm) please refer to the Product table

Connector PIN OUT



Pin	Core color	Definition
1	Red	POWER_IN
2	Green	Line0+
3	Blue	Line2
4	Yellow	Line1+
5	Brown	Line0-/Line 1-
6	Black	GND

! WARNING ! Applying excessive force as well as placing heavy weight on the cable can damage it. Treat the cable carefully and avoid excessive bending, especially when installing it.