

VA-CABLE-USB3-MA-MB-3m



3m USB3.0 cable male A to male B Cable USB3

Highlights

- High quality and approved by Daheng Imaging
- Can be used with CABLE-H-USB3-EXTB-0.25M-5VJST




Product specification

Connector 1	USB3.0 B, Male, Blue insulator, solder type
Connector 2	USB 3.0 A, Male, Blue insulator, solder type
Wire	UL2725 (27AWG*1P+EAM)* 2 PCS+ (27AWG*1P+A) + (26AWG*2C+AB)
Wire OD	5.8 mm
Jacket wire	Black PVC
Outer Mold	Connector Overmold Violet PVC
Test	<ul style="list-style-type: none">• 100% Open and Short testing• Insulation resistance 20MΩ (Min)• Voltage 300V DC/ 10 ms• Contact Resistance 3Ω (Max)

Product table


Part number	Cable Length, L
VA-CABLE-USB3-MA-MB-3m	3 m

Technical drawing

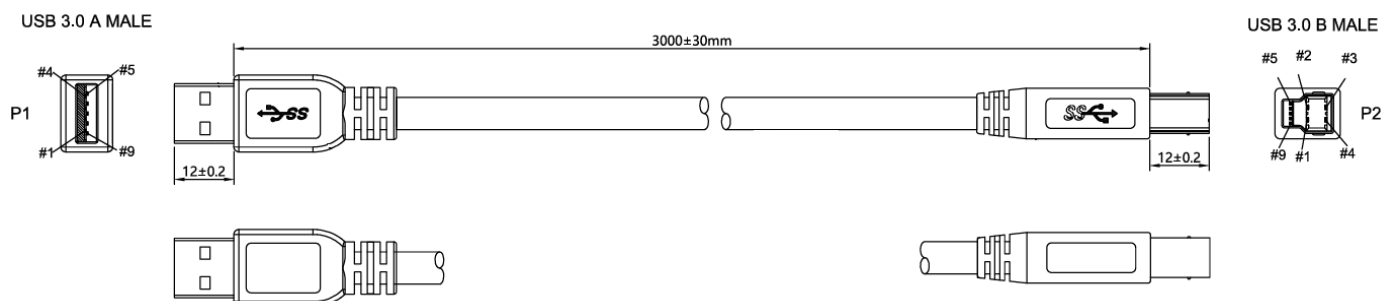

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither VA Imaging nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

Connector PIN OUT

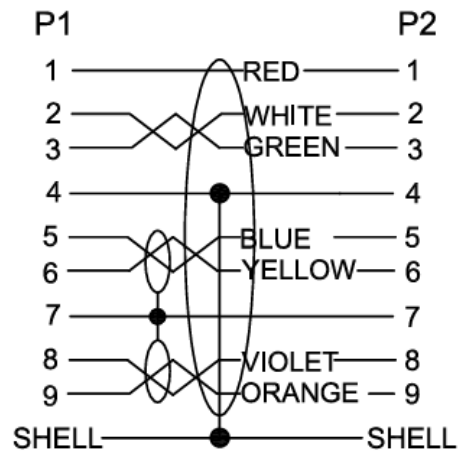

! WARNING ! Applying excessive force as well as placing heavy weight on the cable can damage it. Treat the cable carefully and avoid excessive bending, especially when installing it.