

# VA-CABLE-cat5e-XXm-90D

GigE cable, 90 Degree angled



## Highlights

- High quality and approved by Daheng Imaging
- 90 Degree connector



## Product specification


<b>Cable attribute</b>	Static
<b>End A connector</b>	RJ45
<b>End B connector</b>	RJ45
<b>Cross section</b>	24AWG
<b>Cable diameter</b>	6.5±0.2mm
<b>Insulating material</b>	HD-PE
<b>Minimum bending radius</b>	65mm
<b>Max. voltage</b>	500V
<b>Cable resistance</b>	89.2Ω/km
<b>Jacket</b>	PVC
<b>Cable color</b>	Black
<b>Data rate</b>	100MB
<b>Tensile property</b>	1.05kgf/mm <sup>2</sup>
<b>Durability</b>	Max. 500 plug and pull cycles
<b>Contact resistance</b>	< 50mΩ
<b>Contact plating</b>	Gold
<b>Plug insulation material</b>	PC
<b>Operating temp.</b>	0°C ~ +80°C
<b>Certification</b>	RoHS, UL

## Product table

Part number	Cable Length, L
VA-CABLE-cat5e-3m-90D	3 m
VA-CABLE-cat5e-5m-90D	5 m
VA-CABLE-cat5e-7m-90D	7 m
VA-CABLE-cat5e-10m-90D	10 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither VA Imaging nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

## Technical drawing

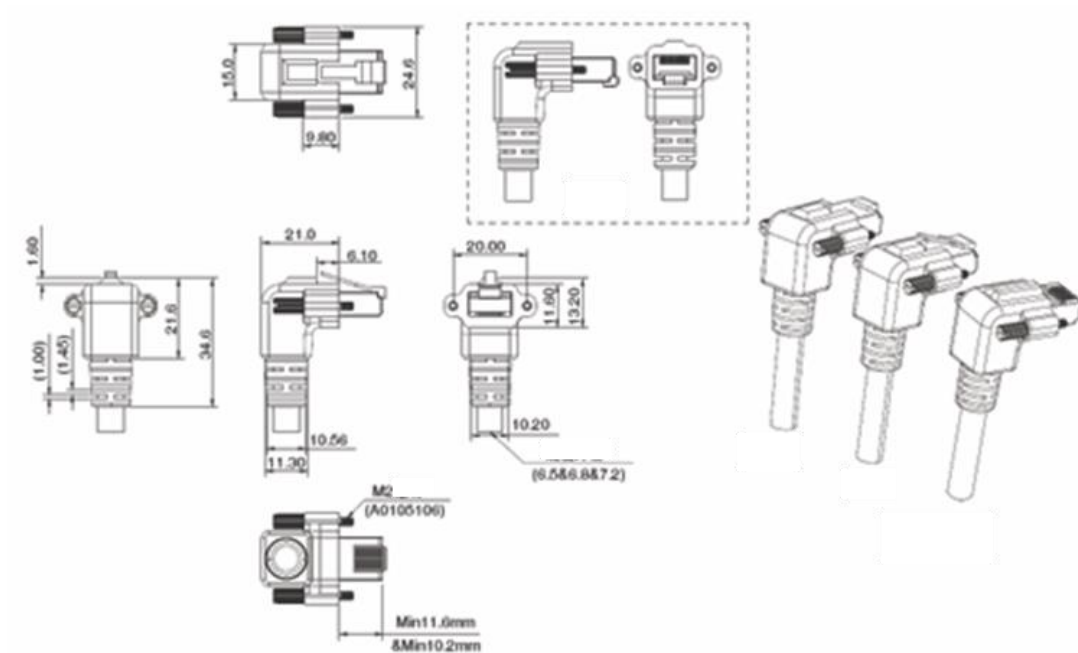

\* for L parameter please refer to the Product table

**! WARNING !** Applying excessive force as well as placing heavy weight on the cable can damage it. Treat the cable carefully and avoid excessive bending, especially when installing it.