

# VA-CABLE-cat6a-xxm

GE RJ45/S to RJ45 xxm Cat.6A



## Highlights

- High quality and approved by Daheng Imaging
- Suitable for 2.5GigE, 5GigE and 10GigE cameras.



## Product specification


<b>Interface for camera</b>	RJ45 M
<b>Interface for PC</b>	RJ45 M
<b>Cross-section</b>	4P*26AWG
<b>Radius</b>	6.0 ±0.2 mm
<b>Insulating material</b>	HDPE
<b>Jacket material</b>	PVC
<b>Minimum bending radius</b>	50 mm
<b>Data Speed</b>	1000 MB
<b>Tensile Strength</b>	1.05 kgf/mm <sup>2</sup>
<b>Working temperature</b>	-20°C ~ 75 °C
<b>Certificates</b>	UL, RoHS
<b>Maximum working power</b>	300 V

## Product table

Part number	Cable Length, L
VA-CABLE-cat6a-3m	3 m
VA-CABLE-cat6a-5m	5 m
VA-CABLE-cat6a-10m	10 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither VA Imaging nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

## Technical drawing

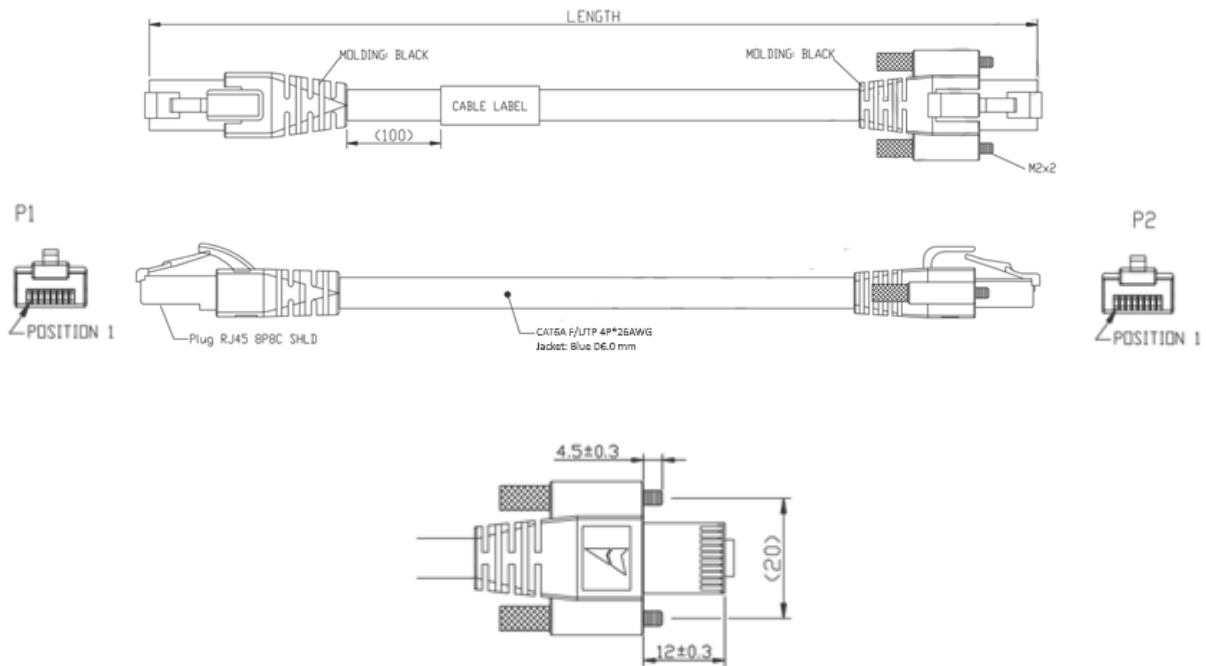

\* for L parameter please refer to the Product table


Length Tolerance:

3 m + 90 mm

5 m + 150 mm

10 m + 300 mm

## Connector PIN OUT

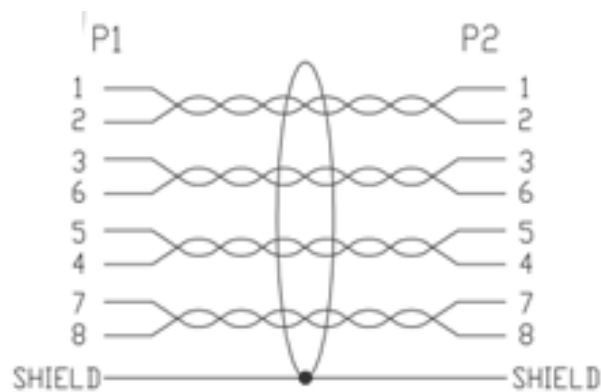

**! WARNING !** Applying excessive force as well as placing heavy weight on the cable can damage it. Treat the cable carefully and avoid excessive bending, especially when installing it.